Advanced Course Computer Science

Music Processing

Summer Term 2009

Meinard Müller

Saarland University and MPI Informatik
meinard@mpi-inf.mpg.de

Music Synchronization

UNIVERSITÄT DES SAARLANDES

max planck institut informatik

Music Data

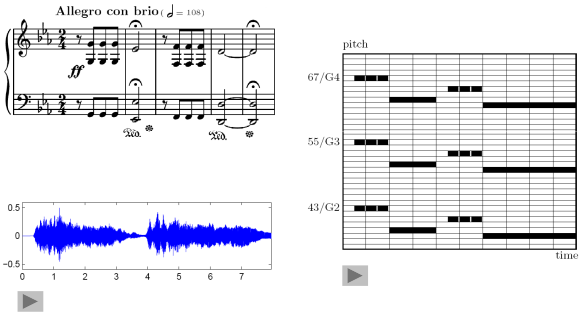

Music Data

Various interpretations – Beethoven's Fifth

Bernstein	▶
Karajan	▶
Scherbakov (piano)	▶
MIDI (piano)	▶

General Goals

- Automated organization of complex and inhomogeneous music collections
- Generation of annotations and cross-links
- Tools and methods for multimodal search, navigation and interaction

Music Information Retrieval (MIR)

Music Synchronization

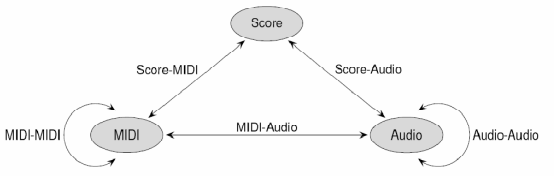

Schematic view of various synchronization tasks

Music Synchronization

- Turetsky/Ellis (ISMIR 2003)
- Soulez/Rodet/Schwarz (ISMIR 2003)
- Arifi/Clausen/Kurth/Müller (ISMIR 2003)
- Hu/Dannenberg/Tzanetakis (WASPAA 2003)
- Müller/Kurth/Röder (ISMIR 2004)
- Raphael (ISMIR 2004)
- Dixon/Widmer (ISMIR 2005)
- Müller/Mattes/Kurth (ISMIR 2006)
- Dannenberg /Raphael (Special Issue ACM 2006)
- Kurth/Müller/Fremerey/Chang/Clausen (ISMIR 2007)
- Fujihara/Goto (ICASSP 2008)
- Wang/Iskandar/New/Shenoy (IEEE T-ASLP 2008)

Music Synchronization: Audio-Audio

Given: Two different audio recordings of the same underlying piece of music.

Goal: Find for each position in one audio recording the musically corresponding position in the other audio recording.

Music Synchronization: Audio-Audio

Beethoven's Fifth

Karajan



Scherbakov



Music Synchronization: Audio-Audio

Beethoven's Fifth

Karajan



Scherbakov



Synchronization: Karajan → Scherbakov

Music Synchronization: Audio-Audio

Bach Toccata

Koopman



Ruebsam



Music Synchronization: Audio-Audio

Bach Toccata

Koopman



Ruebsam



Synchronization: Koopman → Ruebsam

Music Synchronization: Audio-Audio

- Transformation of audio recordings into sequences of feature vectors
  $\rightsquigarrow \quad V := (v^1, v^2, \ldots, v^N)$
  $\rightsquigarrow \quad W := (w^1, w^2, \ldots, w^M)$
- Fix cost measure c on the feature space
- Compute $N \times M$ cost matrix $C(n,m) := c(v^n, w^m)$
- Compute cost-minimizing warping path from C

Chroma Features

Example: Bach Toccata

Koopman ▶ ▶ Ruebsam ▶ ▶

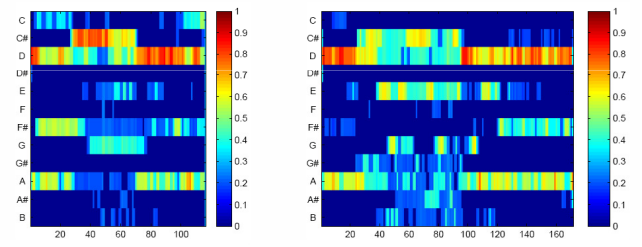

Feature resolution: 10 Hz

Chroma Features

Example: Bach Toccata

Koopman ▶ ▶ Ruebsam ▶ ▶

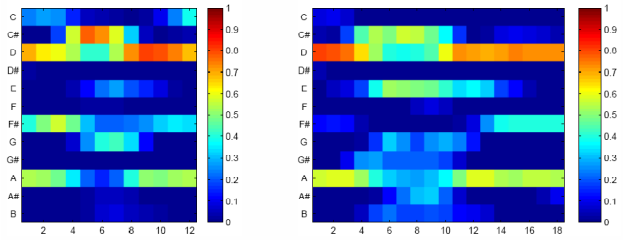

Feature resolution: 1 Hz

Music Synchronization: Audio-Audio

- Koopman $\rightsquigarrow$ $V := (v^1, v^2, \ldots, v^N)$ $N = 12$

  Ruebsam $\rightsquigarrow$ $W := (w^1, w^2, \ldots, w^M)$ $M = 18$

- v^n, w^m = 12-dimensional normalized chroma vectors

- Local cost measure $c : \mathbb{R}^{12} \times \mathbb{R}^{12} \rightarrow \mathbb{R}$

$$c(v^n, w^m) := 1 - \langle v^n, w^m \rangle$$

- $N \times M$ cost matrix $C(n, m) := c(v^n, w^m)$

Music Synchronization: Audio-Audio

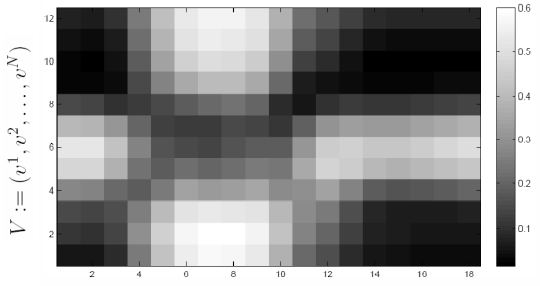

Music Synchronization: Audio-Audio

Cost-minimizing warping path

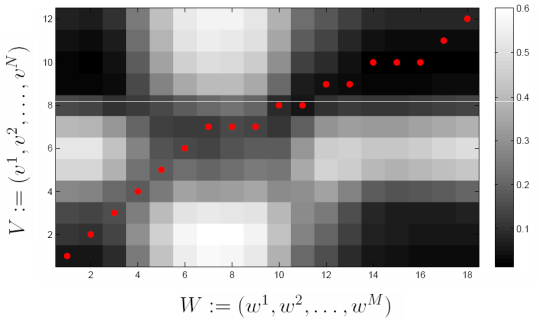

Cost-Minimizing Warping Path

- Computation via dynamic programming

  $\rightsquigarrow$ Dynamic Time Warping (DTW)

- Memory requirements and running time: *O*(*NM*)

- Problem: Infeasible for large *N* and *M*

- Example: Feature resolution 10 Hz, pieces 15 min

  $\Rightarrow$ *N, M* ~ 10,000

  $\Rightarrow$ *N* · *M* ~ *100,000,000*

Strategy: Global Constraints

Sakoe-Chiba band



Itakura parallelogram



Strategy: Global Constraints

Sakoe-Chiba band



Itakura parallelogram



Problem: Optimal warping path not in constraint region

Strategy: Multiscale Approach



Compute optimal warping path on coarse level

Strategy: Multiscale Approach



Project on fine level

Strategy: Multiscale Approach



Specify constraint region

Strategy: Multiscale Approach



Compute *constrained* optimal warping path

Strategy: Multiscale Approach

- Suitable features?
- Suitable resolution levels?
- Size of constraint regions?

Good trade-off between efficiency and robustness?

Strategy: Multiscale Approach

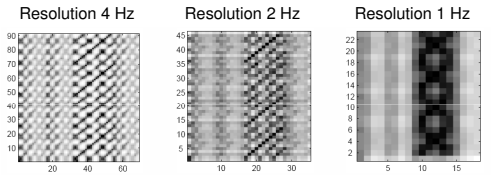

Strategy: Multiscale Approach

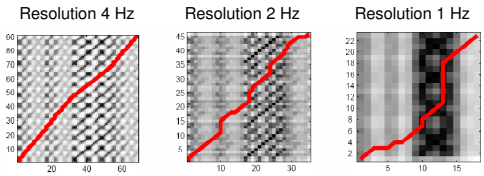

Problem: Cost matrix may degenerate
$\rightsquigarrow$ useless warping path

Strategy: Multiscale Approach

Improve robustness by enhancing cost matrix

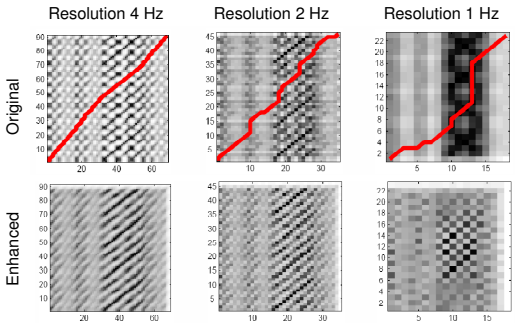

Strategy: Multiscale Approach

Improve robustness by enhancing cost matrix

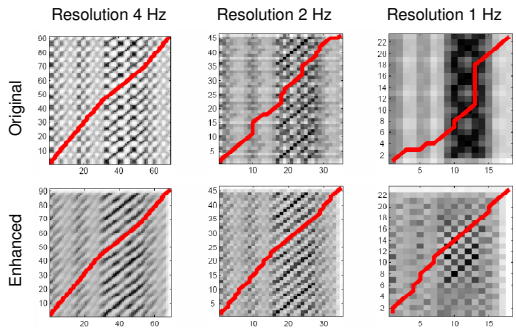

Strategy: Multiscale Approach

Chroma features at three levels: 0.33 Hz / 1 Hz / 10 Hz

Recording 1	length [sec]	Recording 2	length [sec]	t_{DTW} [sec]	t_{MsDTW} [sec]	[%]
Beet9Bern	1144.9	Beet9Kar	1054.8	31.18	1.08	3.46

Strategy: Multiscale Approach

Chroma features at three levels: 0.33 Hz / 1 Hz / 10 Hz

Recording 1	length [sec]	Recording 2	length [sec]	t_{DTW} [sec]	t_{MsDTW} [sec]	[%]
Beet9Bern	1144.9	Beet9Kar	1054.8	31.18	1.08	3.46

Number of matrix entries needed for DTW and MsDTW:

	DTW	MsDTW	%
Level 1	120,808,050	2,117,929	1.75
Level 2	1,209,030	17,657	1.46
Level 3	134,464	134,464	100

Music Synchronization: Audio-Audio

Conclusions

- Chroma features
  - ⇝ suited for harmony-based music
- Relatively coarse but good global alignments
- Multiscale approach: simple, robust, fast

Music Synchronization: Audio-Audio

Applications

- Efficient music browsing
- Blending from one interpretation to another one
- Mixing and morphing different interpretations
- Tempo studies

System: Match (Dixon)

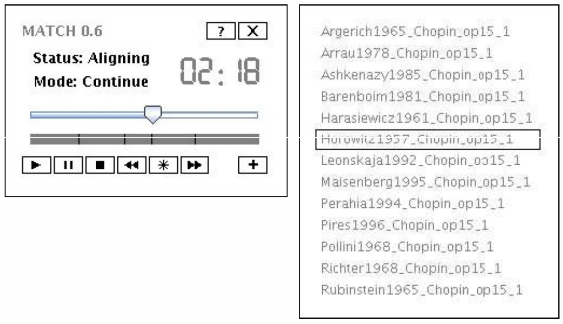

System: SyncPlayer/AudioSwitcher

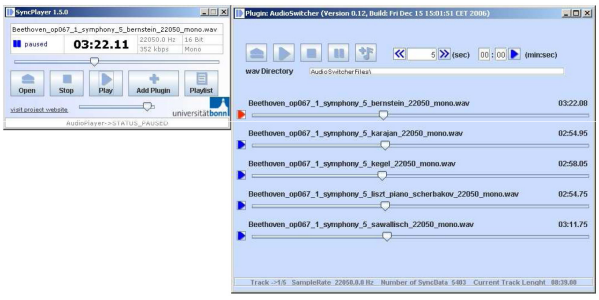

Music Synchronization: MIDI-Audio

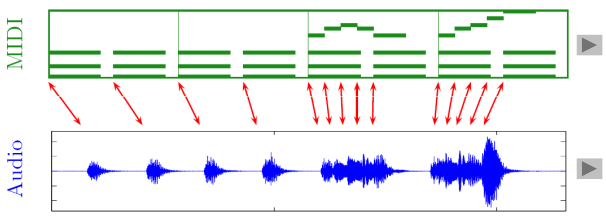

Music Synchronization: MIDI-Audio

MIDI = metadata

Automated annotation

Audio recording

Sonification of annotations

Music Synchronization: MIDI-Audio

Applications

- Automated audio annotation
- Accurate audio access after MIDI-based retrieval
- Automated tracking of MIDI note parameters during audio playback

Music Synchronization: Scan-Audio

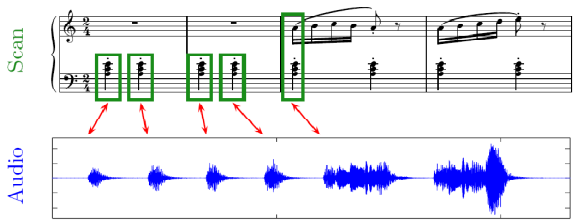

Music Synchronization: Scan-Audio

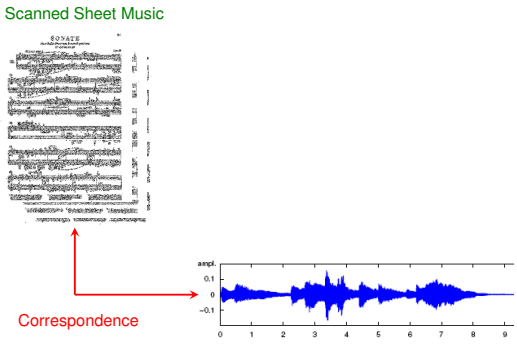

Music Synchronization: Scan-Audio

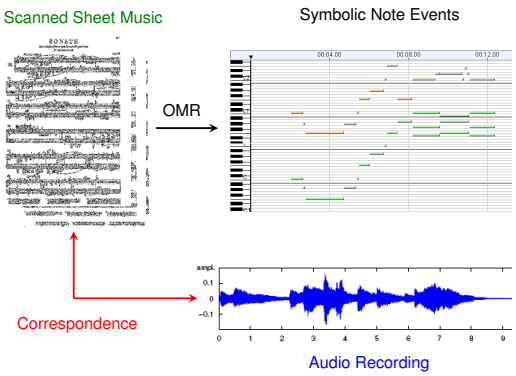

Music Synchronization: Scan-Audio

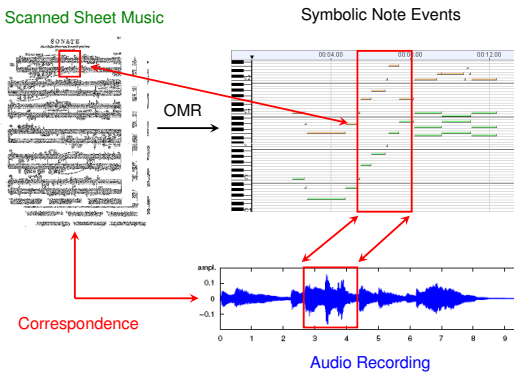

Music Synchronization: Scan-Audio

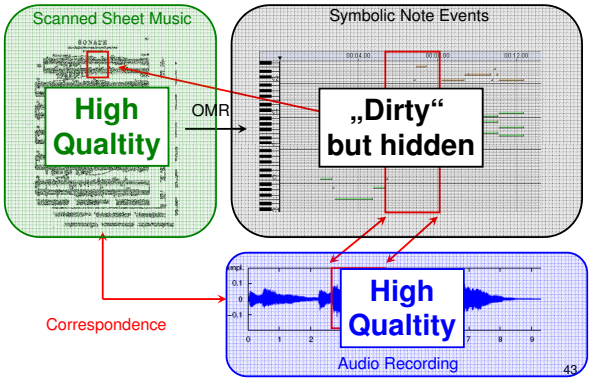

System: SyncPlayer/SheetMusic

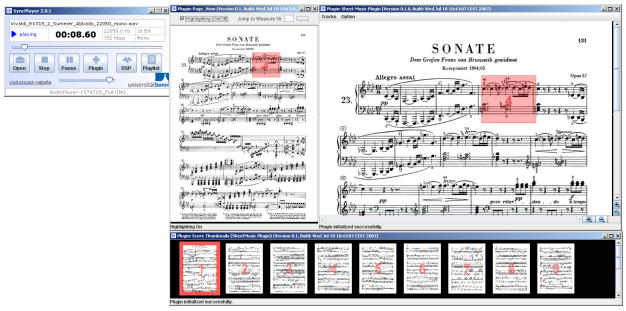

Music Synchronization: Lyrics-Audio

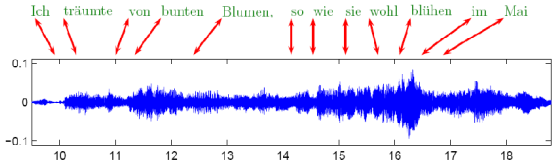

Difficult task!

Music Synchronization: Lyrics-Audio

Lyrics-Audio → Lyrics-MIDI + MIDI-Audio

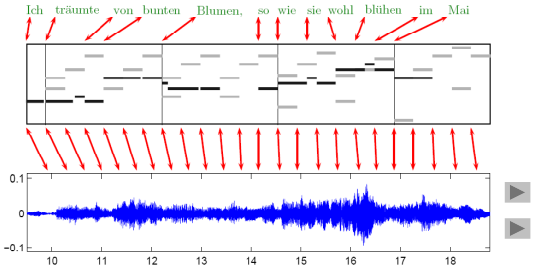

System: SyncPlayer/LyricsSeeker

Conclusions: Music Synchronization

Various requirements

- Efficiency
- Robustness
- Accuracy
- Variablity of music

Conclusions: Music Synchronization

Combination of various strategies

- Feature level
- Local cost measure level
- Global alignment level
- Evidence pooling using competing strategies

Conclusions: Music Synchronization

Combination of various strategies

- Feature level
- Local cost measure level
- Global alignment level
- Evidence pooling using competing strategies

Example: MIDI-Audio synchronization

Chroma-Chroma:
Chroma-Chroma + onset-bonus:

Conclusions: Music Synchronization

Offline vs. Online

- Online version: Dixon/Widmer (ISMIR 2005)
- Hidden Markov Models: Raphael (ISMIR 2004)
- Score-following
- Automatic accompaniment

Conclusions: Music Synchronization

Presence of variations

- Instrumentation
- Musical structure
- Polyphony
- Musical key
- …